

図 GC-SEM


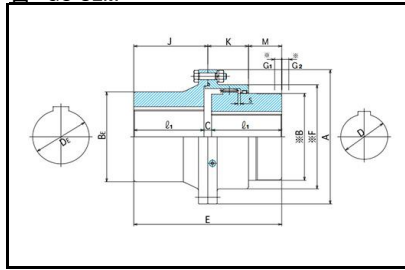


図 GC-SSM

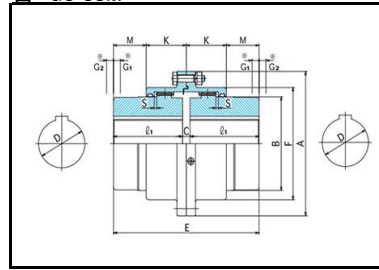

型番 外形 (mm)	軸径 最大/最小	ギヤヤ カップリング 型番	在庫 ○	許容最高 回転数 (rpm)	基準 トルク N-m	伝達容量表 (単位は、上段KW・下段N-m)													各部寸法 (mm)										貯油量 (ℓ)	質量 (kg)	GD2 (kgf·m)		
						回転数 (rpm)													E	ℓ1	C	K	M	J	B	F	BE	S				G1	G2
						100	200	500	750	1000	1200	1500	1800	3000	3600	4000																	
100	32/17	GC-SEM-100	○	4000	421	4.1	8.1	18.4	26.6	34.5	40.5	49.3	57.8	89.1	104	113	98	45	8	34	15	49	46	67	55	2	4	10	0.032	3.0	0.011		
		GC-SSM-100	○			387	385	352	339	329	323	314	306	284	275	270						70			0.043				2.9	0.0112			
112	40/17	GC-SEM-112	◎	4000	788	7.5	14.5	33.8	48.8	63.0	73.9	89.7	105	161	187	204	108	50	8	40	14	54	58	79	70	2	1	14	0.042	4.6	0.0197		
		GC-SSM-112	◎			718	692	646	621	602	588	571	557	513	496	486						0.055			4.3				0.0198				
125	50/22	GC-SEM-125	◎	4000	1400	13.2	25.4	59.1	84.9	109	128	155	181	277	321	350	134	63	8	43	24	67	70	92	80	2.5	9	7	0.056	6.7	0.0348		
		GC-SSM-125	◎			1260	1210	1130	1080	1045	1020	989	962	882	853	835						0.072			6.6				0.0353				
140	56/22	GC-SEM-140	◎	4000	2010	18.9	36.2	83.7	120	154	180	218	254	387	448	487	150	71	8	47	28	75	80	107	90	2.5	11	7	0.085	9.3	0.0591		
		GC-SSM-140	◎			1800	1730	1600	1530	1470	1440	1390	1350	1230	1190	1160						0.11			9.3				0.0612				
160	65/22	GC-SEM-160	◎	4000	3080	28.7	54.9	126	181	232	271	328	381	578	668	725	170	80	10	52	33	85	95	120	105	3	12	7	0.11	14	0.111		
		GC-SSM-160	◎			2740	2620	2420	2300	2220	2160	2090	2020	1840	1770	1730						0.14			14				0.113				
180	75/32	GC-SEM-180	◎	4000	4730	43.8	83.7	192	274	351	410	494	575	868	1000	1090	190	90	10	56	39	95	105	134	115	3	15	5	0.14	19	0.183		
		GC-SSM-180	◎			4190	4000	3660	3490	3350	3260	3150	3050	2760	2660	2600						0.18			19				0.191				
200	85/32	GC-SEM-200	◎	3810	6750	62.2	118	270	385	493	575	692	904	1210	1390		210	100	10	61	44	105	120	149	135	3	18	5	0.18	26	0.317		
		GC-SSM-200	◎			5940	5650	5170	4910	4710	4570	4410	4270	3850	3700							0.24			26				0.315				
224	100/42	GC-SEM-224	◎	3410	9810	89.3	169	384	546	696	811	974	1130	1690			236	112	12	65	53	118	145	174	150	4	25	1	0.29	38	0.579		
		GC-SSM-224	◎			8530	8090	7340	6950	6650	6450	6200	5990	5830								0.36			39				0.599				
250	115/42	GC-SEM-250	◎	3050	14400	130	246	554	784	998	1160	1390	1610	2400			262	125	12	74	57	131	165	200	180	4	28	1	0.41	56	1.08		
		GC-SSM-250	◎			12400	11700	10600	9990	9530	9240	8860	8550	7640								0.53			55				1.08				
280	135/42	GC-SEM-280	◎	2720	22900	205	386	866	1220	1550	1800	2160	2490				294	140	14	82	65	147	190	224	210	4.5	28	1	0.56	83	2.14		
		GC-SSM-280	◎			19500	18400	16500	15600	14800	14300	13700	13200									0.69			81				2.06				
315	160/100	GC-SEM-315	◎	24200	36100	319	598	1330	1880	2380	2750	3290	3800				356	170	16	98	80	178	225	260	250	5.5	33	1	0.90	135	4.55		
		GC-SSM-315	◎			30400	28600	25500	23900	22700	21900	21000	20100									1.1			129				4.24				
355	180/125	GC-SEM-355	◎	2150	54400	476	892	1980	2780	3520	4070	4860	5600				396	190	16	108	90	198	250	288	275	5.5	34	1	1.10	184	7.50		
		GC-SSM-355	◎			45500	42600	37800	35400	33600	32400	30900	29700									1.3			177				7.00				
400	200/140	GC-SEM-400	◎	1900	76400	661	1230	2720	3810	4800	5550	6610	7610				418	200	18	114	95	209	285	329	325	6.5	39	0	1.6	261	7.13		
		GC-SSM-400	◎			63100	58900	52000	48500	45900	44200	42100	40400									2.0			242				12.5				